



## CENTREFIRE RIFLE CARTRIDGES

# GECO EXPRESS

**GECO 8x57 JS EXPRESS 11,7g**

|                        |                                   |
|------------------------|-----------------------------------|
| Item no:               | <b>2421108</b>                    |
| Bullet type:           | <b>Fragmentation</b>              |
| Bullet Weight:         | <b>11,7 g / 180 gr</b>            |
| Barrell Length:        | <b>600 mm</b>                     |
| Ballistic Coefficient: | <b>0.255</b>                      |
| Caliber:               | <b>8x57 JS</b>                    |
| Unit size:             | <b>20</b>                         |
| Lead:                  | <b>Yes</b>                        |
| Recoil:                | <b>Medium</b>                     |
| Usage for:             | <b>Heavy Game<br/>Medium Game</b> |

## HIGHLIGHTS

- The GECO EXPRESS TIP yields high precision and the best effectiveness even when hunting at long distances
- Strikingly streamlined projectile for a flat trajectory
- High bullet speed and an extreme instantaneous effect in the target
- GECO SPECIAL JACKET provides good knock-down power

## DESCRIPTION

GECO EXPRESS is suited to any hunting scenario that demands accuracy and efficacy at long range.



BALLISTIC DATA

Metric


| Velocity   |     | Energy   |      | Zero Range |       |           |
|------------|-----|----------|------|------------|-------|-----------|
| V0 [m/s]   | 816 | E0 [J]   | 3462 |            | 100m  | MRD* 160m |
| V50 [m/s]  | 758 | E50 [J]  | 2988 | 50m        | -0.4  | 1.6       |
| V100 [m/s] | 703 | E100 [J] | 2570 | 100m       | ∅     | 4         |
| V150 [m/s] | 648 | E150 [J] | 2184 | 150m       | -4.6  | 1.3       |
| V200 [m/s] | 596 | E200 [J] | 1847 | 200m       | -15.1 | -7.2      |
| V250 [m/s] | 547 | E250 [J] | 1556 | 250m       | -32.6 | -22.6     |
| V300 [m/s] | 503 | E300 [J] | 1316 | 300m       | -58.3 | -46.4     |

Imperial

| Velocity    |      | Energy        |      | Zero Range |        |             |
|-------------|------|---------------|------|------------|--------|-------------|
| V0 [ft/s]   | 2677 | E0 [ft/lbs]   | 2554 |            | 100yds | MRD* 176yds |
| V50 [ft/s]  | 2504 | E50 [ft/lbs]  | 2234 | 50yds      | -0.3   | 0.5         |
| V100 [ft/s] | 2336 | E100 [ft/lbs] | 1945 | 100yds     | ∅      | 1.6         |
| V150 [ft/s] | 2171 | E150 [ft/lbs] | 1680 | 150yds     | -1.3   | 1           |
| V200 [ft/s] | 2011 | E200 [ft/lbs] | 1441 | 200yds     | -4.4   | -1.3        |
| V250 [ft/s] | 1862 | E250 [ft/lbs] | 1236 | 250yds     | -9.7   | -5.8        |
| V300 [ft/s] | 1721 | E300 [ft/lbs] | 1055 | 300yds     | -17.6  | -12.9       |



## Bullet construction of GECO EXPRESS

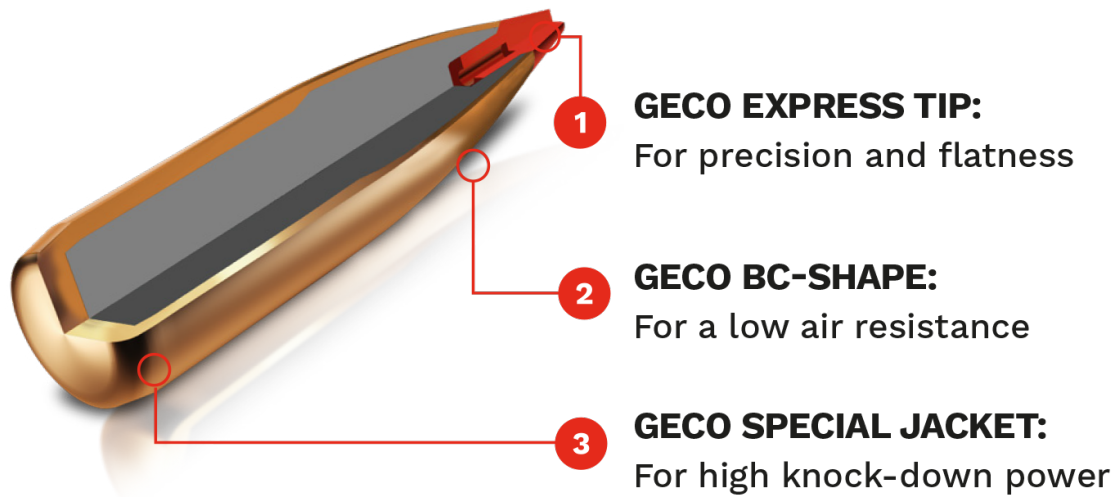



## PERFORMANCE

