



CENTREFIRE RIFLE CARTRIDGES

GECO ZERO

GECO 8x57 JRS ZERO 9,0g

| | |
|------------------------|--|
| Item no: | 2318948 |
| Bullet type: | Fragmentation |
| Bullet Weight: | 9,0 g / 139 gr |
| Barrell Length: | 600 mm |
| Ballistic Coefficient: | 0.225 |
| Caliber: | 8x57 JRS |
| Unit size: | 20 |
| Lead: | No |
| Recoil: | Medium |
| Usage for: | Light Game Medium Game Heavy Game |

HIGHLIGHTS

- Lead-free semi-jacketed bullet for all types of game
- Highly innovative jacketed bullet with two tin cores
- Hollow-point construction for high accuracy and best effectiveness
- Front tin core with radial arrangement of predetermined breaking points for a reliably rapid response and high instantaneous effectiveness
- Rear tin core with rear constriction for stability in the residual body and a secure exit wound

DESCRIPTION

GECO ZERO is a highly effective and accurate, lead-free bullet for all types of game.



BALLISTIC DATA

Metric


| Velocity | | Energy | | Zero Range | | |
|------------|------------|----------|-------------|------------|--------------|------------------|
| V0 [m/s] | 850 | E0 [J] | 3251 | | 100m | MRD* 163m |
| V50 [m/s] | 779 | E50 [J] | 2731 | 50m | -0.5 | 1.5 |
| V100 [m/s] | 712 | E100 [J] | 2281 | 100m | ∞ | 4 |
| V150 [m/s] | 651 | E150 [J] | 1907 | 150m | -4.4 | 1.6 |
| V200 [m/s] | 594 | E200 [J] | 1588 | 200m | -14.6 | -6.6 |
| V250 [m/s] | 542 | E250 [J] | 1322 | 250m | -31.7 | -21.8 |
| V300 [m/s] | 494 | E300 [J] | 1098 | 300m | -57.3 | -45.4 |

Imperial

| Velocity | | Energy | | Zero Range | | |
|-------------|-------------|---------------|-------------|------------|---------------|--------------------|
| V0 [ft/s] | 2789 | E0 [ft/lbs] | 2398 | | 100yds | MRD* 180yds |
| V50 [ft/s] | 2577 | E50 [ft/lbs] | 2048 | 50yds | -0.3 | 0.4 |
| V100 [ft/s] | 2372 | E100 [ft/lbs] | 1735 | 100yds | ∞ | 1.6 |
| V150 [ft/s] | 2185 | E150 [ft/lbs] | 1472 | 150yds | -1.2 | 1.1 |
| V200 [ft/s] | 2011 | E200 [ft/lbs] | 1247 | 200yds | -4.2 | -1.1 |
| V250 [ft/s] | 1851 | E250 [ft/lbs] | 1057 | 250yds | -9.4 | -5.5 |
| V300 [ft/s] | 1701 | E300 [ft/lbs] | 892 | 300yds | -17.2 | -12.5 |



Bullet construction of GECO ZERO

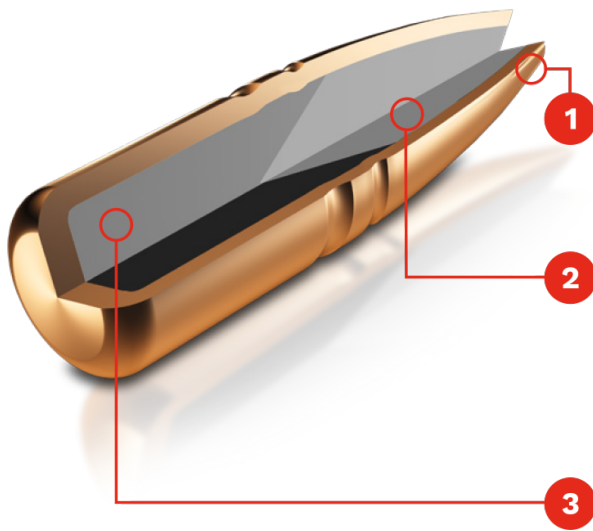

1 GECO PERFORMANCE POINT:

For accuracy and certain expansion

2 PRE-FRAGMENTED TIN FRONT CORE:

For reliable performance and solid stopping power

3 REAR CANNELURE:

For heigh weight retention and a certain exit wound



Product Datasheet

