

THE WORLD OF GECO	3	PISTOLS & REVOLVERS	26
Foreword	3	New Products	27
GECO News	4	Overview	28
		ACTION EXTREME	29
CENTREFIRE RIFLE	7	ACTION EXTREME FRAGMENTATION	30
CARTRIDGES	1	HEXAGON	31
	_	Ballistic Data	32
HUNTING	7		
New Products	8	RIMFIRE	36
Overview	9		
STAR	10	RIFLE & SEMI-AUTO	36
ZERO	11		
PLUS	12	AIRGUN	37
EXPRESS	13		
SOFTPOINT	14	DIABOLO & SUPERPOINT	37
Ballistic Data	15		
SPORT SHOOTING	19	SHOTSHELLS	38
New Products	20	CCS BLACK 26 & CCS RED 28	38
Overview	21	CC BUCKSHOT & DYNAMIC BIRD SHOT	39
TARGET HP	22	CC BOCKSHOT & DITAMIC BIND SHOT	55
TARGET FMJ	23		
DTX	24	RELOADING	40
Ballistic Data	25	COMPONENTS	
		Primers	41
A AMERICAN AND AND AND AND AND AND AND AND AND A		Bullets	42
H. A. San		Cases	44

# CONTENT

PTICS	45
iflescopes	46
ed Dot Sights	49
inoculars	50
	53
CONOGRAPHIE	53
conographie	53
IOTES	54
otes	54
	5/0
	1 8





Innovative developments and growth have shaped the GECO brand since its foundation in 1887:

Originally a weapons and ammunition wholesaler, GECO quickly developed into a flourishing company.

With more than 130 years of experience and expertise, GECO today offers a modern and wide range of products for hunters and sport shooters worldwide. The assortment ranges from ammunition through optics to selected equipment and covers all applications in hunting and sports. The maxim: high quality standards combined with an attractive value for money.

Over time, in addition to the range, the brand image and the brand perception have continued to develop. The aim of the revision of the brand identity in 2021 is to express the passion of the users more clearly - whether for hunting or sport shooting. The fresh, dynamic new look from GECO underlines the identity of the brand even more clearly.


Our patron Genschow would probably be proud – and rightly so. His guiding principle of "quality products in the service of hunting and sport" remains firmly embedded in the **GECO brand DNA.** Or, as we put it:

WHERE EXCITEMENT STARTS.

# MORE THAN A LOGO A QUALITY SEAL

As part of the brand refresh, one of its most striking recognition elements, the **GECO logo**, has been given a new look that expresses the **dynamics and enthusiasm** for the endeavour in style. Since GECO was founded, great importance has been attached to a **coherent brand presence** and the logo has always been perfected as part of a holistic image.



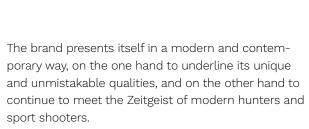

The feeling of tension or suspense in any form – from boundless anticipation to maximum concentration –

is expressed with the new claim "Where Excitement Starts". This is especially true when it comes to active hunting and sport shooting. The shape and components of the new logo visualise precisely this high-stakes feeling of anticipation, excitement, concentration and performance that make the worlds of hunting and sport shooting so special.

# WHERE EXCITEMENT STARTS




## **NEW LOOK!**

# NEW: LABELS ON ALL HUNTING AMMUNITION PACKAGING

#### A small but useful aid is now available to GECO hunting fans.

The new labels include important information on the ballistic data of the respective products and provide an optimal overview for successful deployment.

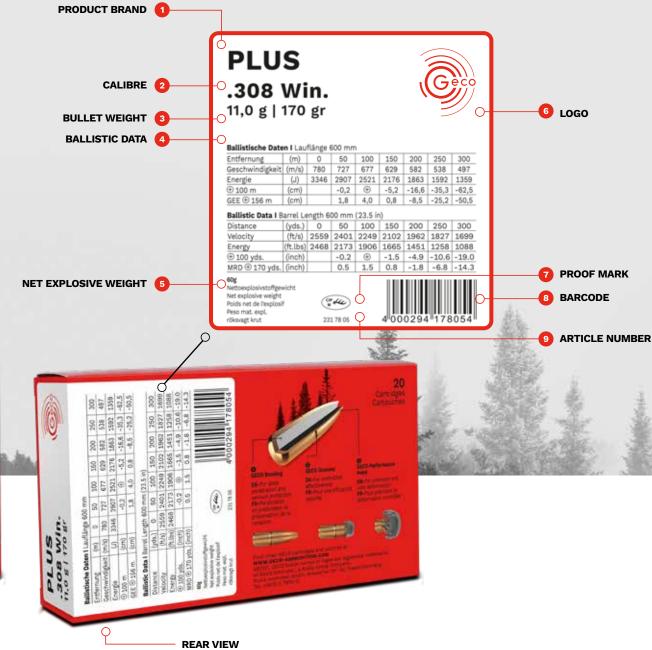



#### **NEW CENTREFIRE RIFLE CARTRIDGES HUNTING**







#### **STAR**



2021/2022: New addition to the product line in the calibres  $8 \times 57$  JS,  $8 \times 57$  JRS and  $9.3 \times 62$ 



#### STAR represents the latest development in GECO's range of hunting

**bullets.** The lead-free deformation bullet promises maximum penetration and a high residual weight.

Due to the hollow point, the new STAR bullet reliably deforms at nearly any hunting distance. Its excellent inherent precision can be attributed to the integrated performance grooves.

GECO STAR is the optimum bullet for all hunters who hunt with lead-free bullets and want to minimise damage to the venison.

#### **STAR COMPONENTS**



2022: STAR bullet in the calibres .30 I 8mm S




## CENTREFIRE RIFLE CARTRIDGES

**GECO HUNTING BULLETS AT A GLANCE** 


# PERFORMANCE ACCURACY FLAT TRAJECTORY KNOCK-DOWN POWER PENETRATION MINIMAL MEAT LOSS

# PERFORMANCE ACCURACY FLAT TRAJECTORY KNOCK-DOWN POWER PENETRATION MINIMAL MEAT LOSS



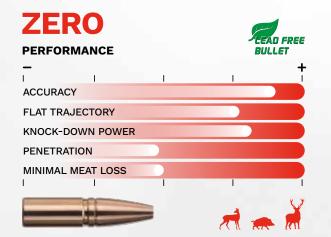

## EXPRESS

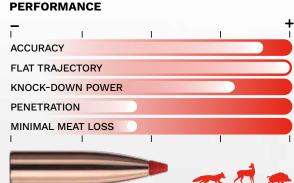






**GECO STAR - The lead-free deformation bullet** promises maximum penetration and a high residual weight.



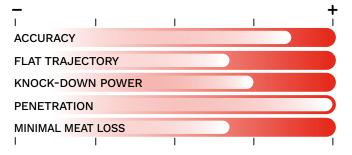










GECO ZERO - The highly effective and accurate lead-free bullet. For all types of game.



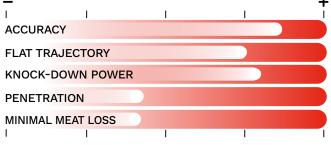








**GECO PLUS - Penetrates deeply and preserves** even larger game.



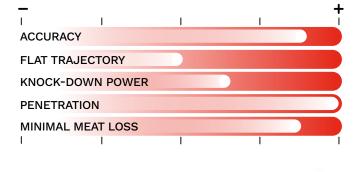









**GECO EXPRESS – Suited to any hunting scenario that** demands accuracy and efficacy at long range.



#### **PERFORMANCE**

**ACCURACY** FLAT TRAJECTORY **KNOCK-DOWN POWER** PENETRATION MINIMAL MEAT LOSS








**GECO SOFTPOINT - Universally applicable and able** to cope with almost any hunting situation.



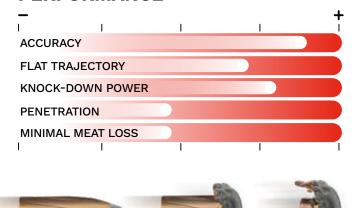



Bullet Item No.	Gram Grain	Barrel in mm BC Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	RZR* 3)	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
.223 REM.					-														
SOFTPOINT	3.4	600	V[m/sec]	980	909	841	777	715	657	601	⊕ 100 m	-0.5	<b>⊕</b>	-2.9	-9.9	-21.7	-39.2	20	
241 34 70	53	0.237	E[J]	1633	1404	1203	1026	870	734	614	RZR 185 m	+1.5	+4.0	+3.0	-2.0	-11.8	-27.2		
EXPRESS	3.6	600	V[m/sec]	1010	926	848	773	703	636	574	⊕ 100 m	-1.1	<b>⊕</b>	-2.4	-8.8	-20.3	-37.9	20	
231 78 33	56	0.202	E[J]	1836	1543	1294	1076	890	728	593	RZR 192 m	+0.9	+4.0	+3.6	-0.9	-10.4	-26.0		
.243 WIN.						,										,			
EXPRESS	4.9	600	V[m/sec]	1020	964	910	857	807	759	713	⊕ 100 m	-1.2	<b>⊕</b>	-1.8	-6.9	-15.8	-29.0	20	
231 78 34	76	0.305	E[J]	2549	2277	2029	1799	1596	1411	1246	RZR 210 m	+0.8	+4.0	+4.3	+1.1	-5.8	-16.9		
SOFTPOINT	6.8	600	V[m/sec]	880	834	789	745	703	663	624	⊕ 100 m	-0.7	$\oplus$	-3.2	-10.9	-23.5	-41.7	20	
212 34 01	105	0.335	E[J]	2633	2365	2117	1887	1680	1495	1324	RZR 179 m	+1.3	+4.0	+2.8	-2.9	-13.5	-29.7		
6.5 CREEDMOOI	R																		
EXPRESS	9.1	600	V[m/sec]	807	771	735	701	668	636	604	⊕ 100 m	-0.4	<b>⊕</b>	-4.1	-13.2	-27.8	-48.5	20	
241 96 37	140	0.406	E[J]	2963	2705	2458	2236	2030	1840	1660	RZR 168 m	+1.6	+4.0	+1.9	-5.1	-17.7	-36.4		
6.5 x 55 SE																			
EXPRESS	9.1	650	V[m/sec]	730	697	666	635	605	576	548	⊕ 100 m	0.0	<b>⊕</b>	-5.6	-17.2	-35.6	-61.3	20	
241 96 38	140	0.428	E[J]	2425	2210	2018	1835	1665	1510	1366	RZR 153 m	+2.0	+4.0	+0.4	-9.3	-25.6	-49.4		
PLUS	10.1	600	V[m/sec]	750	704	660	618	577	538	501	⊕ 100 m	0.0	$\oplus$	-5.6	-17.7	-37.1	-65.1	20	
231 78 39	156	0.308	E[J]	2841	2503	2200	1929	1681	1462	1268	RZR 152 m	+2.0	+4.0	+0.3	-9.7	-27.2	-53.2		
.270 WIN.																			
EXPRESS	8.4	600	V[m/sec]	940	893	847	803	760	719	679	⊕ 100 m	-1.0	$\oplus$	-2.5	-8.7	-19.3	-34.5	20	
231 78 36	130	0.344	E[J]	3711	3349	3013	2708	2426	2171	1936	RZR 194 m	+1.1	+4.0	+3.6	-0.7	-9.2	-22.4		
SOFTPOINT	9.1	600	V[m/sec]	910	846	785	727	671	618	567	⊕ 100 m	-0.8	$\oplus$	-3.2	-11.1	-24.4	-44.2	20	
231 78 22	140	0.247	E[J]	3768	3257	2804	2405	2049	1738	1463	RZR 178 m	+1.2	+4.0	+2.8	-3.1	-14.4	-32.3		
PLUS	9.7	600	V[m/sec]	850	802	755	710	667	625	586	⊕ 100 m	-0.6	$\oplus$	-3.7	-12.3	-26.4	-46.9	20	
231 78 37	150	0.316	E[J]	3504	3120	2765	2445	2158	1895	1665	RZR 172 m	+1.4	+4.0	+2.3	-4.3	-16.4	-34.8		
7x57																			
ZERO	8.2	600	V[m/sec]	870	814	760	708	659	611	566	⊕ 100 m	-0.6	<b>⊕</b>	-3.6	-12.1	-26.3	-47.1	20	Ą
231 88 17	127	0.274	E[J]	3103	2717	2368	2055	1781	1531	1313	RZR 173 m	+1.4	+4.0	+2.4	-4.1	-16.3	-35.0		BU
SOFTPOINT	10.7	600	V[m/sec]	800	759	720	681	644	608	574	⊕ 100 m	-0.4	<b>⊕</b>	-4.4	-14.0	-29.6	-51.9	20	
231 85 61	165	0.360	E[J]	3424	3082	2773	2481	2219	1978	1763	RZR 164 m	+1.6	+4.0	+1.6	-6.0	-19.6	-39.9		



																/			
Bullet Item No.	Gran Graii		n V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* ³)	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
7x57R																			
ZERO	8.2	600	V[m/sec]	820	766	714	664	616	571	527	⊕ 100 m	-0.4	$\oplus$	-4.4	-14.4	-30.9	-55.0	20	
231 88 18	3 127	0.274	E[J]	2757	2406	2090	1808	1556	1337	1139	RZR 163 m	+1.6	+4.0	+1.6	-6.4	-20.9	-42.9		EEAD I
SOFTPOIN	IT 10.7	600	V[m/sec]	750	711	673	636	600	566	533	⊕ 100 m	-0.1	$\oplus$	-5.4	-16.8	-35.1	-61.0	20	
212 33 55	5 165	0.360	E[J]	3009	2705	2423	2164	1926	1714	1520	RZR 154 m	+1.9	+4.0	+0.6	-8.9	-25.2	-49.1		
7 MM REM.	MAG.						-												
ZERO	8.2	650	V[m/sec]	980	919	861	805	752	700	651	⊕ 100 m	-1.0	$\oplus$	-2.3	-8.3	-18.7	-34.2	20	
231 88 68	3 127	0.274	E[J]	3938	3463	3039	2657	2319	2009	1738	RZR 197 m	+1.0	+4.0	+3.8	-0.3	-8.7	-22.1		EULLE BULLE
EXPRESS	10.0	650	V[m/sec]	890	852	816	780	746	712	679	⊕ 100 m	-0.8	<b>⊕</b>	-2.9	-9.8	-21.1	-37.3	20	
231 78 43	3 155	0.418	E[J]	3961	3630	3329	3042	2783	2535	2305	RZR 186 m	+1.2	+4.0	+3.1	-1.8	-11.1	-25.2		
PLUS	11.0	650	V[m/sec]	866	825	785	746	709	672	637	⊕ 100 m	-0.7	<b>⊕</b>	-3.3	-11.0	-23.6	-41.6	20	
231 78 44	170	0.375	E[J]	4125	3743	3389	3061	2765	2484	2232	RZR 178 m	+1.3	+4.0	+2.7	-3.0	-13.6	-29.7		
.280 REN	l.																		
SOFTPOIN	IT 10.7	600	V[m/sec]	830	788	748	709	671	634	598	⊕ 100 m	-0.5	<b>⊕</b>	-3.9	-12.6	-26.8	-47.2	20	
211 75 84	165	0.360	E[J]	3686	3322	2993	2689	2409	2150	1913	RZR 170 m	+1.5	+4.0	+2.1	-4.6	-16.8	-35.2		
7x64																			
ZERO	8.2	600	V[m/sec]	940	881	824	770	718	668	620	⊕ 100 m	-0.9	$\oplus$	-2.7	-9.6	-21.2	-38.3	20	
231 88 19	127	0.274	E[J]	3623	3182	2784	2431	2114	1830	1576	RZR 188 m	+1.1	+4.0	+3.3	-1.5	-11.1	-26.2		CEAD I
STAR	9.1	650	V[m/sec]	928	856	788	720	655	596	543	⊕ 100 m	-0.8	<b>⊕</b>	-3.1	-11.1	-24.8	-45.4	20	CEAD I
242 09 7	7 140	0.222	E[J]	3918	3334	2825	2359	1952	1616	1342	RZR 178 m	1.2	4.0	2.9	-3.0	-14.7	-33.4		BULLE
EXPRESS	10.0	600	V[m/sec]	880	843	806	771	737	703	670	⊕ 100 m	-0.8	$\oplus$	-3.0	-10.1	-21.8	-38.4	20	
231 78 40	155	0.418	E[J]	3872	3553	3248	2972	2716	2471	2245	RZR 184 m	+1.2	+4.0	+3.0	-2.1	-11.7	-26.3		
SOFTPOIN	IT 10.7	600	V[m/sec]	840	798	757	718	679	642	607	⊕ 100 m	-0.6	$\oplus$	-3.7	-12.2	-26.0	-45.8	20	
212 33 12	165	0.360	E[J]	3775	3407	3066	2758	2467	2205	1971	RZR 172 m	+1.4	+4.0	+2.3	-4.2	-16.0	-33.8		
PLUS	11.0	600	V[m/sec]	830	790	751	713	677	641	607	⊕ 100 m	-0.5	0	-3.8	-12.5	-26.5	-46.5	20	
231 78 4	1 170	0.375	E[J]	3789	3433	3102	2796	2521	2260	2026	RZR 171 m	+1.5	+4.0	+2.2	-4.4	-16.4	-34.4		
7x65 R																			
ZERO	8.2	600	V[m/sec]	890	833	778	726	676	627	581	⊕ 100 m	-0.7	<b>⊕</b>	-3.3	-11.3	-24.7	-44.4	20	
231 88 20	127	0.274	E[J]	3248	2845	2482	2161	1874	1612	1384	RZR 177 m	+1.3	+4.0	+2.7	-3.3	-14.7	-32.3		CEAD I
SOFTPOIN	IT 10.7	600	V[m/sec]	800	759	720	681	644	608	574	⊕ 100 m	-0.4	<b>⊕</b>	-4.4	-14.0	-29.6	-51.9	20	
212 26 8	5 165	0.360	E[J]	3424	3082	2773	2481	2219	1978	1763	RZR 164 m	+1.6	+4.0	+1.6	-6.0	-19.6	-39.9		
PLUS	11.0	600	V[m/sec]	810	771	732	695	659	624	590	⊕ 100 m	-0.4	<b>⊕</b>	-4.2	-13.4	-28.3	-49.5	20	

<sup>1)</sup> BC value = Ballistic coefficient

231 78 42

3609

3269

E[J]

RZR 167 m +1.6

-18.2 -37.4

<sup>2)</sup> V = Velocity, E = Energy

<sup>2389</sup> 3) RZR = Recommended Zero Range

	Bullet Item No.	Gram Grain	Barrel in mm BC Value 1)	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* ³)	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
_	.308 WIN.																			
The second second	ZERO	8.8	600	V[m/sec]	870	803	739	679	621	566	515	⊕ 100 m	-0.6	$\oplus$	-3.9	-13.2	-28.8	-52.2	20	TEAD FR
	231 88 23	136	0.229	E[J]	3330	2837	2403	2029	1697	1410	1167	RZR 168 m	+1.4	+4.0	+2.1	-5.2	-18.9	-40.3		BULLET
COLUMN TO SERVICE AND ADDRESS OF THE PARTY O	STAR	10.7	600	V[m/sec]	783	746	709	673	638	605	573	⊕ 100 m	-0.3	<b>⊕</b>	-4.6	-14.6	-30.7	-53.5	20	سند
	241 38 33	165	0.388	E[J]	3280	2977	2689	2423	2178	1958	1757	RZR 162 m	+1.7	+4.0	+1.5	-6.5	-20.6	-41.4		LEAD FR BULLET
	EXPRESS	10.7	600	V[m/sec]	825	788	752	717	683	649	617	⊕ 100 m	-0.5	$\oplus$	-3.8	-12.4	-26.3	-46.0	20	
12.00	231 78 04	165	0.404	E[J]	3641	3322	3025	2750	2496	2253	2037	RZR 171 m	+1.5	+4.0	+2.2	-4.4	-16.2	-33.9		
	SOFTPOINT	11.0	600	V[m/sec]	790	742	696	652	610	569	530	⊕ 100 m	-0.3	$\oplus$	-4.8	-15.4	-32.6	-57.4	20	
-	212 34 28	170	0.305	E[J]	3433	3028	2664	2338	2047	1781	1545	RZR 159 m	+1.7	+4.0	+1.1	-7.5	-22.7	-45.5		
100000	PLUS	11.0	600	V[m/sec]	780	727	677	629	582	538	497	⊕ 100 m	-0.2	$\oplus$	-5.2	-16.6	-35.3	-62.5	20	
	231 78 05	170	0.274	E[J]	3346	2907	2521	2176	1863	1592	1359	RZR 156 m	+1.8	+4.0	+0.8	-8.5	-25.2	-50.5		
-	.30-06																			
PER COLUMN TO SERVICE STATE OF THE SERVICE STATE STATE OF THE PER COLUMN TO SERVICE STATE OF THE SERVICE STATE STATE STATE OF THE SERVICE STATE	ZERO	8.8	600	V[m/sec]	920	851	785	722	662	605	551	⊕ 100 m	-0.8	$\oplus$	-3.2	-11.1	-24.7	-45.0	20	-
-	231 88 21	136	0.229	E[J]	3724	3186	2711	2294	1928	1611	1336	RZR 178 m	+1.2	+4.0	+2.8	-3.1	-14.7	-33.0		LEAD FR BULLET
-	STAR	10.7	600	V[m/sec]	824	786	750	714	680	646	614	⊕ 100 m	-0.5	$\oplus$	-3.8	-12.5	-26.5	-46.4	20	
	241 38 35	165	0.397	E[J]	3633	3305	3009	2727	2474	2233	2017	RZR 171 m	+1.5	+4.0	+2.2	-4.5	-16.4	-34.3		LEAD FR BULLET
	EXPRESS	10.7	600	V[m/sec]	864	826	789	753	718	683	650	⊕ 100 m	-0.7	<b>⊕</b>	-3.2	-10.8	-23.1	-40.8	20	
11000	231 78 06	165	0.404	E[J]	3994	3650	3330	3033	2758	2496	2260	RZR 179 m	+1.3	+4.0	+2.7	-2.8	-13.2	-28.8		
The latest and the la	SOFTPOINT	11.0	600	V[m/sec]	840	791	743	697	653	610	569	⊕ 100 m	-0.5	<b>⊕</b>	-3.9	-12.9	-27.6	-49.0	20	
	212 33 20	170	0.305	E[J]	3881	3441	3036	2672	2345	2047	1781	RZR 169 m	+1.5	+4.0	+2.1	-4.9	-17.6	-37.0		
- 11 tologo	PLUS	11.0	600	V[m/sec]	835	780	728	677	629	583	539	⊕ 100 m	-0.5	$\oplus$	-4.2	-13.7	-29.4	-52.4	20	
	231 78 07	170	0.274	E[J]	3835	3346	2915	2521	2176	1869	1598	RZR 166 m	+1.5	+4.0	+1.9	-5.7	-19.4	-40.4		
-	.300 WIN. MAG.																			
Total State of	ZERO	8.8	650	V[m/sec]	1010	936	866	799	736	675	618	⊕ 100 m	-1.1	$\oplus$	-2.2	-8.2	-18.8	-34.8	20	_
-	231 88 22	136	0.229	E[J]	4488	3855	3300	2809	2383	2005	1680	RZR 197 m	+0.9	+4.0	+3.8	-0.2	-8.8	-22.8		LEAD FR BULLET
-	STAR	10.7	650	V[m/sec]	921	879	839	802	766	729	693	⊕ 100 m	-0.9	$\oplus$	-2.6	-9.0	-19.5	-34.7	20	_
	241 38 36	165	0.387	E[J]	4538	4134	3766	3441	3139	2843	2569	RZR 193 m	+1.1	+4.0	+3.5	-0.9	-9.5	-22.6		LEAD FR BULLET
	EXPRESS	10.7	650	V[m/sec]	970	929	889	850	812	775	740	⊕ 100 m	-1.1	<b>⊕</b>	-2.0	-7.5	-16.6	-29.9	20	
12-22	231 78 08	165	0.404	E[J]	5034	4617	4228	3865	3527	3213	2930	RZR 205 m	+0.9	+4.0	+4.0	+0.6	-6.5	-17.8		
- 1 to 100	SOFTPOINT	11.0	650	V[m/sec]	950	896	845	795	748	701	657	⊕ 100 m	-1.0	<b>⊕</b>	-2.5	-8.8	-19.6	-35.3	20	
	211 75 76	170	0.305	E[J]	4964	4415	3927	3476	3077	2703	2374	RZR 193 m	+1.0	+4.0	+3.6	-0.8	-9.5	-23.3		
	PLUS	11.0	650	V[m/sec]	940	881	824	770	718	668	620	⊕ 100 m	-0.9	<b>⊕</b>	-2.7	-9.6	-21.2	-38.3	20	
	231 78 09	170	0.274	E[J]	4860	4269	3734	3261	2835	2454	2114	RZR 188 m	+1.1	+4.0	+3.3	-1.5	-11.1	-26.2		

<sup>1)</sup> BC value = Ballistic coefficient











<sup>2)</sup> V = Velocity, E = Energy

<sup>3)</sup> RZR = Recommended Zero Range

													1				1			
	Bullet Item No.	Gram Grain	Barrel in mm BC Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* ³)	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/ box	
_	8 x 57 JS									-										
-	ZERO	9.0	600	V[m/sec]	900	829	760	695	636	581	530	⊕ 100 m	-0.7	<b>⊕</b>	-3.6	-12.2	-27.0	-49.0	20	سند
-	231 89 47	139	0.225	E[J]	3645	3093	2599	2174	1820	1519	1264	RZR 173 m	+1.3	+4.0	+2.5	-4.2	-16.9	-36.9		BULL
	STAR	10.4	600	V[m/sec]	816	758	703	648	596	547	503	⊕ 100 m	-0.4	<b>⊕</b>	-4.6	-15.1	-32.6	-58.3	20	750
	242 47 29	160	0.255	E[J]	3462	2988	2570	2184	1847	1556	1316	RZR 160 m	1.6	+4.0	+1.3	-7.2	-22.6	-46.4		BULI
	SOFTPOINT	12.0	600	V[m/sec]	790	731	674	621	570	521	476	⊕ 100 m	-0.2	$\oplus$	-5.2	-16.8	-36.0	-64.3	20	
	212 33 39	185	0.245	E[J]	3745	3206	2726	2314	1949	1629	1359	RZR 155 m	+1.8	+4.0	+0.7	-8.9	-26.1	-52.4		
	PLUS	12.7	600	V[m/sec]	750	709	670	631	595	559	525	⊕ 100 m	-0.1	$\oplus$	-5.4	-17.0	-35.5	-61.9	20	
	231 78 45	196	0.346	E[J]	3572	3192	2851	2528	2248	1984	1750	RZR 154 m	+1.9	+4.0	+0.6	-9.0	-25.5	-50.0		
-	8x57 JRS	,					,							,		,		,		
	ZERO	9.0	600	V[m/sec]	850	779	712	651	594	542	494	⊕ 100 m	-0.5	<b>⊕</b>	-4.4	-14.6	-31.7	-57.3	20	سند
4	231 89 48	139	0.225	E[J]	3251	2731	2281	1907	1588	1322	1098	RZR 163 m	+1.5	+4.0	+1.6	-6.6	-21.8	-45.4		BULL
Ü	STAR	10.4	600	V[m/sec]	836	776	719	664	612	562	515	⊕ 100 m	-0.5	<b>⊕</b>	-4.3	-14.2	-30.7	-54.9	20	1500
	242 47 30	160	0.251	E[J]	3634	3131	2688	2293	1948	1642	1379	RZR 164 m	+1.5	+4.0	+1.7	-6.2	-20.7	-43.0		BULL
	SOFTPOINT	12.0	600	V[m/sec]	760	702	647	595	545	498	455	⊕ 100 m	0.0	<b>⊕</b>	-5.9	-18.7	-39.8	-71.0	20	
	212 33 98	185	0.245	E[J]	3466	2957	2512	2124	1782	1488	1242	RZR 150 m	+2.0	+4.0	+0.1	-10.8	-29.9	-59.1		
	PLUS	12.7	600	V[m/sec]	710	670	632	595	560	526	493	⊕ 100 m	+0.2	<b>⊕</b>	-6.4	-19.7	-40.9	-70.9	20	
	231 78 46	196	0.346	E[J]	3201	2851	2536	2248	1991	1757	1543	RZR 147 m	+2.2	+4.0	-0.4	-11.8	-30.9	-59.0		
_	9.3 x 62			-																
Pine.	ZERO	11.9	600	V[m/sec]	870	806	746	688	632	580	530	⊕ 100 m	-0.6	$\oplus$	-3.8	-12.8	-28.0	-50.6	20	150
	231 89 50	184	0.241	E[J]	4504	3865	3311	2816	2377	2002	1671	RZR 170 m	+1.4	+4.0	+2.2	-4.8	-18.0	-38.5		BULL
. 1	STAR	16.2	600	V (m/s)	738	679	624	571	520	473	432	⊕ 100 m	+0.2	$\oplus$	-6.5	-20.5	-43.7	-78.1	20	LEE A
	242 61 17	250	0.237	E (J)	4412	3734	3154	2641	2190	1812	1512	RZR 146 m	+2.2	+4.0	-0.5	-12.6	-33.8	-66.2		BULL
	EXPRESS	16.5	600	V[m/sec]	760	724	689	655	622	591	560	⊕ 100 m	-0.2	<b>⊕</b>	-5.0	-15.8	-32.9	-57.0	20	
	231 78 47	255	0.398	E[J]	4765	4324	3916	3539	3192	2882	2587	RZR 158 m	+1.9	+4.0	+1.0	-7.7	-22.8	-44.9		
	SOFTPOINT	16.5	600	V[m/sec]	760	709	660	612	568	525	484	⊕ 100 m	-0.1	<b>⊕</b>	-5.6	-17.8	-37.6	-66.3	20	
٠.	231 18 42	255	0.277	E[J]	4765	4147	3594	3090	2662	2274	1933	RZR 152 m	+1.9	+4.0	+0.4	-9.8	-27.6	-54.4		
	PLUS	16.5	600	V[m/sec]	740	698	658	619	581	545	510	⊕ 100 m	0.0	0	-5.7	-17.8	-37.2	-64.9	20	
	231 78 48	255	0.335	E[J]	4518	4019	3572	3161	2785	2450	2146	RZR 152 m	+2.0	+4.0	+0.3	-9.8	-27.2	-52.8		
	9.3 x 74 R																			
200	ZERO	11.9	600	V[m/sec]	825	764	705	648	595	545	497	⊕ 100 m	-0.4	0	-4.6	-15.0	-32.4	-58.1	20	June 1
	231 89 51	184	0.241	E[J]	4050	3473	2957	2498	2106	1767	1470	RZR 161 m	+1.6	+4.0	+1.4	-7.0	-22.4	-46.1		BULI
	SOFTPOINT	16.5	600	V[m/sec]	740	690	641	595	551	509	470	⊕ 100 m	+0.1	0	-6.1	-19.1	-40.2	-70.9	20	
1	212 33 47	255	0.277	E[J]	4518	3928	3390	2921	2505	2137	1822	RZR 149 m	+2.1	+4.0	-0.1	-11.1	-30.2	-58.9		
	PLUS	16.5	600	V[m/sec]	730	688	648	610	573	537	502	⊕ 100 m	+0.1	<b>⊕</b>	-5.9	-18.5	-38.5	-67.1	20	

<sup>1)</sup> BC value = Ballistic coefficient

4396

RZR 150 m +2.1

-28.6

2709

NEW

NEW

NEW

<sup>2)</sup> V = Velocity, E = Energy

<sup>3)</sup> RZR = Recommended Zero Range

# CENTREFIRE RIFLE CARTRIDGES SPORT SHOOTING 11:4:4:41 CENTREFIRE RIFLE CARTRIDGES GECO offers a full portfolio for active and modern sport shooters. The new GECO TARGET HP product line guarantees outstanding accuracy. Its products are reliable companions when shooting at long range and ideal for competitions and practice sessions alike. GECO TARGET FMJ - particularly suitable for intensive and continuous practice and for use with semi-automatic weapons with a high rate of fire. For guaranteed precision. Ideal for IPSC shooters. Shooting at an affordable price for constant self-improvement. The GECO DTX line was designed specifically to meet the needs of shooters who use a lot of ammunition: the balanced value for money of the GECO DTX offers the proven GECO quality in a balanced training cartridge.

# NEW CENTREFIRE RIFLE CARTRIDGES SPORT SHOOTING



2021 /2022 Q2: New addition for competition and training in the calibre .308 Win.

The new GECO TARGET HP rounds have been specially developed for the shooting range and competitions. Its well-balanced load makes the TARGET HP particularly pleasant to shoot. The precisely manufactured hollow-point bullet guarantees outstanding accuracy even at long distances. What's more, the convenient box of 50 offers very good value for money, ideal for regular training at the shooting range.





2022 Q2: Now additionally available as a LEAD FR lead-free alternative in .308 Win. calibre. BULLET



#### GECO DTX is designed for shooters who use a lot of ammunition.

It's great value for money in the popular calibres .223 Rem. and .308 Win. makes it a well-balanced practice cartridge. Now additionally available as a lead-free alternative in .308 Win, calibre - of course in proven GECO quality.







# CENTREFIRE RIFLE CARTRIDGES GECO SPORT SHOOTING BULLETS AT A GLANCE



#### **TARGET HP**

THE LONG RANGE SHOOTING BULLET

#### **PERFORMANCE**

ACCURACY

FLAT TRAJECTORY

I I I I



#### **TARGET FMJ**

THE TRAINING BULLET - MILITARY

#### **PERFORMANCE**

ACCURACY
FLAT TRAJECTORY



#### DTX

THE PERFECT TRAINING BULLET









The convenient box of 50 TARGET HP offers a very good value for money – ideal for regular training on the shooting range.

<del>-</del>	1	1	
ACCURACY			
FLAT TRAJEC	TORY		
	1	1	1



#### CENTREFIRE RIFLE CARTRIDGES SPORT SHOOTING








GECO TARGET FMJ is particularly suitable for use with semi-automatic weapons with a high rate of fire. They also guarantee maximum precision, a factor that is appreciated by IPSC shooters in particular.

Offering good value for money, the GECO TARGET FMJ line is particularly well-suited to shooters with high training intensities. The FMJ bullet's tombac jacket reduces fouling of the barrel, thereby significantly reducing cleaning intervals and leaving nothing standing in the way of success.

<del>-</del>	1	1	ı	ı	-
ACCURACY					
FLAT TRAJEC	TORY				
1	I	1	ı	I	



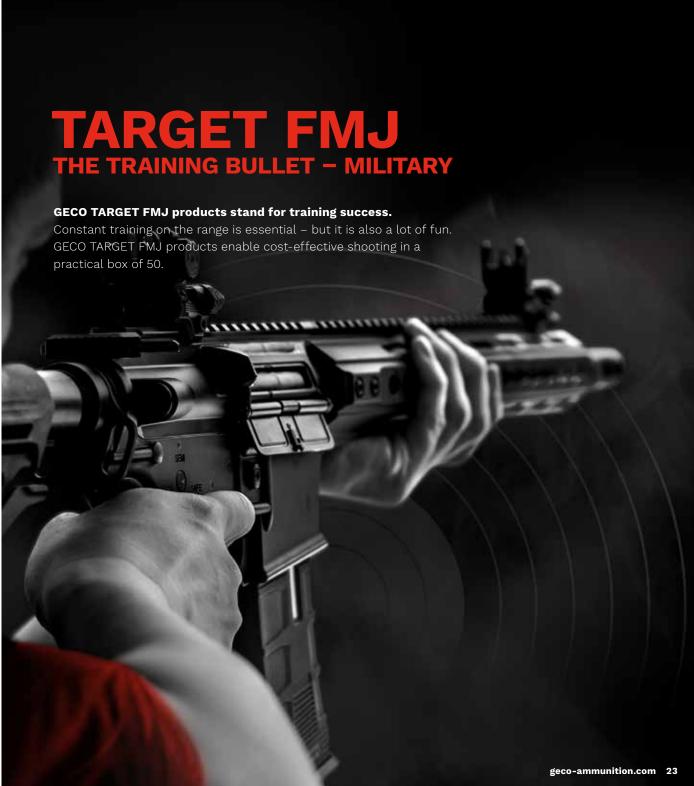

CENTREFIRE RIFLE CARTRIDGES SPORT SHOOTING

# **DTX**THE PERFECT TRAINING BULLET

NEW

2022 Q2: Now additionally available as a lead-free alternative in .308 Win. calibre.

The GECO DTX line was built specifically for the needs of shooters who use a lot of ammunition.



#### CENTREFIRE RIFLE CARTRIDGES SPORT SHOOTING





GECO DTX's great value for money in the popular calibres .223 Rem. and .308 Win. makes it a well-balanced practice cartridge – of course in proven GECO quality.

GECO DTX is designed for shooters who use a lot of ammunition and is particularly suitable for simple training.

_				- +
1	I	1	1	i
ACCURACY				
FLAT TRAJEC	TORY			
1	l		I	1



Bullet Item No		Gram Grain	Barrel length mm BC-Value <sup>1)</sup>	V <sup>2)</sup> E	0 m	50 m	100 m	150 m	200 m	250 m	300 m	⊕ RZR* ³)	50 m	100 m	150 m	200 m	250 m	300 m	Ctg/box
4,6 x 3	0								_				1 /	1					
TARGET F	MJ	2.6	420	V[m/sec]	695	645	597	552	508	468	432	⊕ 100 m	0.5		-7.4	-22.8	-47.8	-84.1	50
241 16 7	'6	40	0.268	E[J]	628	541	463	396	335	285	243	RZR 142 m	+2.5	+4.0	-1.3	-14.7	-37.8	-72.1	
6,5 CREEDI	MOOR																	-	
TARGET		8.4	600	V[m/sec]	859	831	803	776	750	724	699	⊕ 100 m	-0.7		-3.1	-10.2	-21.8	-38.0	50
242 01 0		130	0.548	E[J]	3108	2909	2716	2537	2370	2208	2058	RZR 183 m	+1.3	+4.0	+2.9	-2.2	-11.8	-26.0	00
0.555	<b>6</b> 5																		
6,5 x 55																			
TARGET		8.4	600	V[m/s]	820	793	766	740	714	689	664	⊕ 100 m	-0.5	<b>⊕</b>	-3.6	-11.7	-24.7	-42.8	50
242 15 1	10	130	0.548	E[J]	2832	2649	2472	2307	2148	2000	1857	RZR 174 m	+1.5	+4.0	+2.4	-3.7	-14.7	-30.8	
.223 RE	М.																		
DTX		3.6	600	V[m/sec]	963	908	856	808	761	713	668	⊕ 100 m	-1.0		-2.3	-8.4	-18.8	-33.9	50
242 38 0	05	55	0.302	E[J]	1651	1468	1304	1162	1031	905	794	RZR 197 m	+1.0	+4.0	+3.7	-0.4	-8.7	-21.9	
TARGET F	MJ	3.6	600	V[m/sec]	1010	948	889	832	778	726	676	⊕ 100 m	-1.1	⊕	-2.0	-7.6	-17.0	-31.3	50
231 75 6		55	0.275	E[J]	1837	1618	1423	1247	1090	949	822	RZR 198 m	+0.7	+3.7	+3.5	-0.2	-7.9	-20.3	
TARGET F	MJ	4.1	600	V[m/sec]	950	903	857	813	770	728	688	⊕ 100 m	-1.0	<b>⊕</b>	-2.4	-8.5	-18.6	-33.4	50
231 75 6	62	63	0.345	E[J]	1864	1683	1516	1364	1224	1095	977	RZR 192 m	+0.9	+3.8	3.3	-0.9	-9.1	-22.1	
7,62 x 3	19																		
TARGET F	MJ	8.0	600	V[m/sec]	740	700	662	625	589	555	522	⊕ 100 m	-0.0		-5.6	-17.5	-36.5	-63.5	50
231 78 1	12	124	0.355	E[J]	2245	2009	1797	1602	1422	1263	1117	GEE 153 m	+2.0	+4.0	+0.4	-9.4	-26.4	-51.4	
.308 W	IN.																		
DTX		7.0	600	V[m/sec]	934	871	811	755	701	647	596	⊕ 100 m	-0.9		-2.9	-10.0	-22.2	-40.3	50
242 64	92	108	0.254	E[J]	3053	3053	2302	1995	1720	1465	1243	RZR 185 m	+1.1	+4.0	+3.1	-2.0	-12.2	-28.3	
TARGET F	-MJ	9.5	600	V[m/sec]	865	826	787	750	714	679	645	⊕ 100 m	-0.7		-3.3	-10.9	-23.3	-41.1	50
240 70	05	147	0.392	E[J]	3573	3258	2957	2686	2434	2201	1987	RZR 179 m	+1.3	+4.0	+2.7	-2.9	-13.3	-29.1	
DTX		9.7	600	V[m/sec]	830	793	756	721	687	653	621	⊕ 100 m	-0.1		-4.2	-13.1	-27.2	-47.1	50
241 36 9	99	150	0.423	E[J]	3343	3049	2776	2523	2288	2070	1869	RZR 167 m	+1.9	+4.0	+1.8	-5.1	-17.2	-35.0	
TARGET	HP	10.9	600	V[m/sec]	760	726	694	664	634	604	575	⊕ 100 m	-0.2		-4.9	-15.4	-32.0	-55.3	50
242 69	21	168	0.427	E[J]	3148	2873	2625	2403	2191	1988	1802	RZR 159 m	1.8	4.0	1.1	-7.4	-22.0	-43.3	



# NEW HANDGUN CARTRIDGES





NEW

New additions to the product line in the calibres .40 S&W and .45 Auto

#### Handgun ammunition with unparalleled stopping power.

The bullet mushrooms in a controlled manner and impresses with its outstanding expansion properties. The energy is transferred completely to the target and therefore guarantees superb stopping power. Shooters can always count on GECO ACTION EXTREME.







NEW

New product line (4 calibres) – 9 mm Browning court, 9 mm Luger, .40 S&W, .45 Auto

#### Handgun Ammunition with great penetration depth.

This hollow-point bullet fragments into five pieces, with the four petals quickly detaching from the core piece and spreading evenly. The residual body of this solid copper projectile achieves great penetration depth. Energy transfer from the five pieces is excellent.



# HANDGUN AMMUNITION REVOLVER & PISTOL BULLETS AT A GLANCE

## ACTION EXTREME



The bullet mushrooms in a controlled manner and impresses with its outstanding expansion. The energy is transferred completely to the target and therefore guarantees superb stopping power. Shooters can count on GECO ACTION EXTREME.

#### ACTION E TREME **FRAGMENTATION**



This hollow-point bullet fragments into five pieces, with the four petals quickly detaching from the core piece and spreading evenly. The residual body of this solid copper projectile achieves great penetration depth. The energy transfer from the five pieces is excellent.



The lead exposure in the immediate vicinity of the shooter and the range supervisor can be damaging to one's health. Due to the lead-free GreenFire primer technology that has already been used in NATO-approved ammunition for years, lead is no longer released into the air surrounding the shooter.

In addition, the bullet's rear encapsulation prevents lead particles from detaching when fired.

# HEMAGON



Modelled on the hollow-point design, the HEXAGON bullet was built for absolute precision and without regard for its expansion properties. This non-expanding bullet thus combines the advantages of the HP design, such as the closed end, with optimal potential for accuracy.

#### **FMJ/DTX**



Due to its technically simple construction, the FMJ bullet is easy to manufacture. It is therefore extremely interesting for shooters with high training intensities.

# JACKETED HOLLOW-POINT



The hollow-point bullet is the perfect choice if absolute precision is what you are after. That is why it has enjoyed the trust of top shooters from across the globe for many years now.

#### SOFTPOINT



The semi jacket bullet represents a compromise between the FMJ and the hollow-point bullet in terms of its design.

# COPPER-PLATED LEAD ROUND NOSE



The reduced smoke production and minimal pollution load of the copper-plated variant round off the advantages of the LRN bullet.

## **ENCAPSULATED**



The encapsulated version emerged as a successor product to the conventional FMJ bullets. It is distinguished by a reduced pollution load and smoke production.

#### **WAD CUTTER**



Due to its shoulder-stabilised attitude in flight, the wad cutter bullet allows for outstanding accuracy even with low projectile velocities.

#### **LEAD ROUND NOSE**



The traditional LRN bullet conforms well to the barrel profile and also results in very little wear on the barrel due to reduced friction.






**FOR MORE** INFORMATION



EXCEPTIONAL MUSHROOMING, IMPRESSIVE KNOCK DOWN EFFECT.

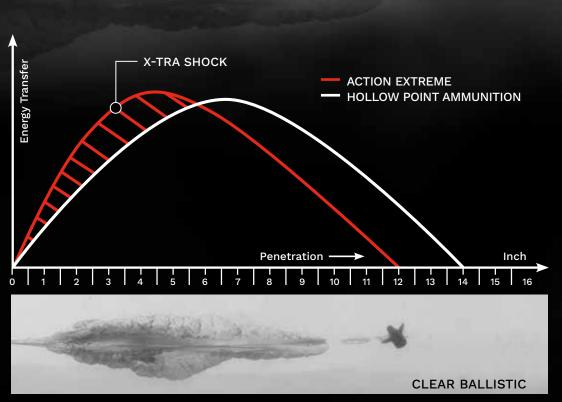

#### **ALL-PURPOSE ROUND**

Hunting – self defence – personal protection

#### **FUNCTION FIRST**

Safe feeding into the chamber through the ogival form of the bullet. Improved ballistic performance due to streamlined projectile form. Closed bullet design prevents blockage of the breech.

#### FOR ALL BARREL LENGTHS

These new cartridges can be used in Full Size, Compact Size and Sub Compact Size pistols and achieve the same performance data in all models.



New additions to the current product line in the calibres .40 S&W and .45 Auto

The monolithic, lead-free deformation bullets show controlled mushrooming and impress with extraordinary expansion. The energy is transferred completely to the target, resulting in excellent stopping power.



**HANDGUN CARTRIDGES** 




FOR MORE INFORMATION



# ACTION EXTREME FRAGMENTATION

**GREATER PENETRATION, PROVEN STOPPING POWER.** 

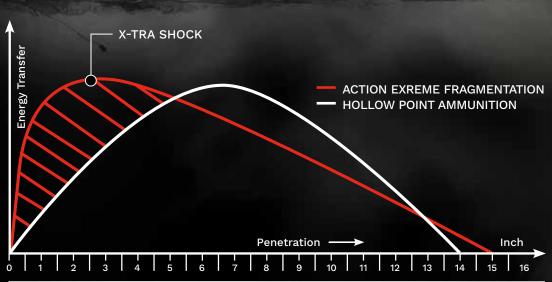



#### **ALL-PURPOSE ROUND**

Hunting – self defence – personal protection

#### **FUNCTION FIRST**

Safe feeding into the chamber through the ogival form of the bullet. Improved ballistic performance due to streamlined projectile form. Closed bullet design prevents blockage of the breech.

#### FOR ALL BARREL LENGTHS

These new cartridges can be used in Full Size, Compact Size and Sub Compact Size pistols and achieve the same performance data in all models.



New product line in the calibres 9 mm Browning court, 9 mm Luger, .40 S&W, .45 Auto

The monolithic, lead-free fragmentation bullets are engineered for all pistol users who prefer greater depth with proven stopping power across the entire velocity range.







HIGH-ACCURACY CASING

With even wall thickness and optimised concentricity.

HIGH-PERFORMANCE POWDER

For consistent speed development and reduced burn-off temperature.

**CLOSED PROJECTILE BASE** 

For shooting without lead emissions.

NATO-APPROVED SINTOX PRIMERS

For ignition free of heavy metals.



#### ADVANTAGEOUS AERODYNAMIC FORM

The almost closed tip is aerodynamically advantageous, as it provides a longer trajectory with less reduction in velocity.

6 STABILISATION GROOVES

The 6 long grooves create what is referred to as the golf ball effect. This means that the air vortex created by the rotation around the longitudinal axis provides additional stabilisation of the projectile in flight.

**OPTIMISED CENTRE OF GRAVITY** 

The centre of gravity of the bullet is shifted to the rear, contributing to the improvement of accuracy.

IMPROVED BARREL GUIDANCE

The long, cylindrical projectile section achieves improved barrel guidance.



# **PISTOL CARTRIDGES**

		-	
-			
	=		
4	=		
		(5)	-
		ė	
	53:		
-			
			-
	NEIREY		
GREE TECH	No.		
GREE	NEIRE		
TEC	OEA		
GREE	Wellog		
32	geco-a	mmu	nition.c

Item No.	Calibre	Bullet	Bullet weight g / gr	Primer	Barrel length (mm)*	V <sub>o</sub>	Velocity V <sub>10</sub>	(m/sec) V <sub>25</sub>	V <sub>50</sub>	E <sub>o</sub>	Energy E <sub>10</sub>	(Joule) E <sub>25</sub>	E <sub>50</sub>	Ctg/ box
212 32 07	6.35 BROWNING	Full Metal Jacket	3.2 / 49	Anvil	60	208	205	201	193	69	67	65	60	50
231 77 03	7.65 BROWNING	Full Metal Jacket	4.75 / 73	Anvil	150	300	294	285	273	214	205	194	177	50
241 69 97	9 MM BROWNING SHORT	ACTION EXTREME	5.5 / 85	Anvil	150	390	378	360	336	418	394	356	310	20
242 12 06	9 MM BROWNING SHORT	ACTION EXTREME Fragmentation	5.5 / 85	Anvil	150	390	378	360	336	418	394	356	310	20
231 77 05	9 MM BROWNING SHORT	Full Metal Jacket	6.15 / 95	Anvil	150	300	294	287	276	277	266	253	234	50
231 85 55	9 MM MAKAROV	Full Metal Jacket	6.15 / 95	Anvil	150	310	304	296	283	288	277	263	240	50
240 81 23	9 MM LUGER	ACTION EXTREME	7.0 / 108	Anvil	150	400	391	377	356	560	535	497	444	20
242 12 05	9 MM LUGER	ACTION EXTREME Fragmentation	7.0 / 108	Anvil	150	400	391	377	356	560	535	497	444	20
241 79 57	9MM LUGER	Full Metal Jacket DTX	7.5 / 115	Anvil	150	370	362	349	332	513	491	457	413	50
231 86 29	9 MM LUGER	Full Metal Jacket	8.0 / 124	Anvil	125	360	350	337	319	518	490	454	407	50
231 82 21	9 MM LUGER	Encapsulated Full Metal Jacket	8.0 / 124	<b>**</b>	125	360	351	340	325	518	493	462	423	50
231 81 95	9 MM LUGER	Copper-Plated Lead Round Nose	8.0 / 124	<b>**</b>	125	360	350	337	319	518	490	454	407	50
231 88 40	9 MM LUGER	HEXAGON	8.0 / 124	<b>**</b>	150	350	341	328	311	490	465	430	387	50

### **PISTOL CARTRIDGES (CONTINUATION)**

	Item No. Calibre		Bullet weight g / gr		Primer	Barrel length Velocity (m/sec) V <sub>0</sub> V <sub>10</sub> V <sub>25</sub>		V <sub>50</sub>	Ener E <sub>o</sub> E <sub>10</sub>		rgy (Joule) E <sub>25</sub> E <sub>50</sub>		Ctg/ box		
	231 77 07	9 MM LUGER	Jacketed Hollow-Point	7.5 / 115	Anvil	150	370	355	335	319	513	472	422	407	50
che find the	240 29 32	9 MM LUGER	Jacketed Hollow-Point	8.0 / 124	<b>**</b>	150	362	355	344	330	524	503	475	435	20
	231 77 08	9 MM LUGER	Full Metal Jacket Flat Nose	10.0 / 154	Anvil	150	283	278	270	259	400	386	366	336	50
	231 77 11	.38 SUPER AUTO	Full Metal Jacket	8.0 / 124	Anvil	150	430	411	385	348	740	675	591	485	50
	242 04 51	.40 S&W	ACTION EXTREME	10.0 / 155	Anvil	150	331	326	319	308	548	532	509	474	20
	242 12 07	.40 S&W	ACTION EXTREME Fragmentation	10.0 / 155	Anvil	150	331	326	319	308	548	532	509	474	20
EEE HIT LEE	240 33 52	.40 S&W	Copper-Plated Lead Round Nose	10.7 / 165	<b>**</b>	150	353	348	340	329	667	647	619	579	50
	231 77 12	.40 S&W	Full Metal Jacket Flat Nose	11.7 / 180	Anvil	150	310	306	301	292	562	548	530	497	50
	242 12 09	.45 AUTO	ACTION EXTREME	11.3 / 175	Anvil	150	321	316	309	299	584	567	541	507	20
	242 12 08	.45 AUTO	ACTION EXTREME Fragmentation	11.3 / 175	Anvil	150	321	316	309	299	584	567	541	507	20
	240 44 64	.45 AUTO	HEXAGON	13.0 / 200	Anvil	150	261	260	258	254	441	437	431	418	50
	231 77 14	.45 AUTO	Full Metal Jacket	14.9 / 230	Anvil	150	260	256	250	240	503	488	466	429	50
ent fill the state of the state	240 30 90	.45 AUTO	Copper-Plated Lead Round Nose	14.9 / 230	*	150	261	259	257	253	508	501	492	476	50
	231 77 15	.45 AUTO	Jacketed Hollow-Point	14.9 / 230	Anvil	150	260	256	250	240	503	488	466	429	50

# REVOLVER CARTRIDGES

50 50 20
20
50
50
50
50
50
50
50
50
50

## SPECIAL CARTRIDGES

SUPER FLASH: Whether as a deterrent or just for fun, the GECO 9 mm P.A. Knall SUPER FLASH offers more than an ordinary blank cartridge: In addition to the loud bang, the SUPER FLASH generates an orange muzzle flash.

This firelight is bright and long-lasting, and therefore an impressive effect not only in the dark. The cartridge can be identified by the white cap.



#### **BLANK CARTRIDGES**

Item No.	Calibre / Use	Ctg./ box	
*231 86 31	6 MM FLOBERT BLANK	100	
*231 86 30	.22 LONG BLANK	50	
*231 73 19	8 MM BLANK	50	
*231 75 30	9 MM PA BLANK	25	
*231 73 22	9 MM PA BLANK	50	
*231 76 95	9 MM PA BLANK SUPER FLASH	25	
*231 86 38	9 MM R BLANK (BP-RK)	50	
*231 75 08	9 MM R BLANK (NITRO-RB)	50	

#### PLASTIC BLANK/ DUMMY CARTRIDGES

Item No.	Calibre / Use	Ctg./ box			
212 82 84	9 MM LUGER BLANK	50			
*231 76 08	9 MM LUGER DUMMY	50			



Item No.	Calibre	Туре	Bullet Weight Type / g	Barrel length mm	V <sub>o</sub>	elocity (m V <sub>50</sub>	/s) V <sub>100</sub>	Er E <sub>o</sub>	nergy (Jou E <sub>50</sub>	le) E <sub>100</sub>	Sighting Distance	POI in cm 25 m	with scope 50 m	5 cm abov 75 m	e bore axis 100 m	Single box	xxxxxx box
213 25 40	.22 l.r.	RIFLE	BR / 2.6	650	330	300	280	142	117	102	50 m	0.6	<b>⊕</b>	-7.4	-22.1	50	500
231 85 99	.22 l.r.	SEMI-AUTO	BR / 2.6	650	350	315	294	159	129	112	50 m	0.3	<b>⊕</b>	-6.5	-19.5	50	500



# AIRGUN

The GECO DIABOLO was developed specifically with beginners and hobby shooters in mind. Because those who like to shoot a lot need accurate airgun pellets at a low price. The standardised processes in the manufacture of this smooth airgun pellet guarantee this. The GECO SUPERPOINT is a smooth airgun pellet with a conical head shape that has a high penetration capability and depth. It is therefore suitable for target shooting as well as for hunting applications in pest control. An optimised weight distribution ensures good accuracy.

Item No.	Туре	Calibre mm	Pellet Weight g	Pellet Length mm	Single pack.	Sales pack.
213 74 53	DIABOLO	4.5	0.45	5.2	500	5000
213 67 40	SUPERPOINT	4.5	0.50	6.9	500	5000



#### **SUPERPOINT**

- For recreational shooters
- Precise air gun pellets at a low price
- Reliable accuracy





#### **DIABOLO**

- For beginners and recreational shooters
- Precise air gun pellets at a low price
- · Reliable accuracy

SMOOTH DESIGN



#### **COATED COMPETITION SLUG BLACK 26** LOW RECOIL

#### The GECO COATED COMPETITION SLUG BLACK 26 offers active shotgun users the following advantages:

- Teflon-coated slug for virtually no lead deposits in the barrel
- · Minimal air pollution with lead vapour
- · Carefully selected powder load for outstanding reliability and low recoil
- Short casing for higher capacity in tubular magazines
- The high velocity of 450 m/sec (1475 fps) makes leading moving targets unnecessary
- Low recoil
- Practical box of 100 with carry strap





#### **COATED COMPETITION SLUG RED 28**

**OPTIMIZED FOR SENSITIVE SEMI-AUTOS** 

#### The GECO COATED COMPETITION SLUG BLACK 28 offers active shotgun users the following advantages:

- Leaves almost no lead fouling in the barrel thanks to its Teflon-coated slug
- Absence of lead fumes leads to low air pollution
- Special powder charge for a safe use in sensitive semi-autos
- Shorter, transparent case allows for a higher capacity in tubular magazines
- The high velocity of 420 m/sec (1377 fps) makes leading moving targets unnecessary
- Practical 100-round pack with carry strap

Item No.	Туре	Gauge	Shot weight in g	V <sub>2,5 m</sub>	Ctg/box
231 76 25	CCS BLACK 26	12 / 67.5	26	450 m/sec	100
241 02 47	CCS RED 28	12 / 67.5	28	420 m/sec	100





#### **COATED COMPETITION BUCK SHOT**

This buckshot shell has been specially developed for IPSC competitions featuring mandatory buckshot stages. It therefore has the following distinct properties:

- 9 pellets with an 8 mm diameter for an optimal hit rate
- · Nickel-coated shot to avoid edge shot, even with narrow choke tubes.
- Very narrow burst thanks to short slots guiding the pellets in the shot cup
- Short case for higher capacity in tubular magazines
- · Works reliably even in responsive semi-automatics
- Low recoil

#### **DYNAMIC BIRD SHOT**

The area of application for these sport shot cartridges includes all dynamic shotgun shooting applications. Specially designed for IPSC disciplines and target shooting, this shell features the following properties:

- 2 versions perfectly suited to different shooting distances
- Cover and pellet weight perfectly calibrated
- Very narrow burst thanks to short slots guiding the pellets in the shot cup
- Short case for higher capacity in tubular magazines
- Works reliably even in responsive semi-automatics
- Low recoil





Item No.	Туре	Gauge	Shot weight in g	Shot sizes in mm	V <sub>2,5 m</sub>	Ctg/box
240 02 32	сс виск ѕнот	12 / 65	27	8.0 mm	410 m/sec	25
240 02 35	DYNAMIC BIRD SHOT 29	12 / 65	29	2.75 mm	400 m/sec	25
240 02 34	DYNAMIC BIRD SHOT 31	12 / 65	31	2.9 mm	390 m/sec	25





GECO reloading components have been valued for decades by sports shooters and hunters and are synonymous with professional quality worldwide. The high-tech components guarantee extremely easy assembly and impress with their optimised sensitivity.

GECO's portfolio includes rifle cartridges, bullets and primer caps, but also encompasses handgun ammunition in the form of bullets, cases as well as the respective percussion caps.



## **BOXER PRIMERS**

GECO reloading components have been valued for decades by sport shooters and hunters and are synonymous with professional quality worldwide.

	Item No.	Туре	0 mm	Suitability	Calibre	pcs/ box	Sales pack.
	242 43 87 2022: not available	SMALL PISTOL PRIMER	4.45	SMALL PISTOL	6.35 7.65 9 MM LUGER 9x21 .32 S&W LONG .38 SPECIAL WC .38 SPECIAL .38 SUPER AUTO .40 S&W .357 MAG.	100	1000
<u> </u>	242 43 88 2022: not availabl	SMALL RIFLE PRIMER	4.45	SMALL RIFLE	.22 HORNET .222 REM. 5.6×50 5.6×50R .30 CARBINE .223 REM.	100	1000



#### To complete the program, GECO offers two Boxer primers: GECO Small Pistol and GECO Small Rifle primers.

The two high-tech components guarantee extremely easy assembly and impress with their optimised sensitivity. Both are available in practical boxes of 100, which offer great value for money.



# FOR CENTREFIRE RIFLE CARTRIDGES

Item No.	Туре	Weight g / gr	Dia	Bullets/box
CALIBRE .243				
214 58 55	SOFTPOINT	6.8 / 105	.243	50
CALIBRE 6,5 MM				
231 85 62	PLUS	10.1 / 156	.264	50
CALIBRE 7 MM				
241 69 69	ZERO	8.2 / 127	.284	50
241 69 85	EXPRESS	10.0 / 155	.284	50
214 54 05	SOFTPOINT	10.7 / 165	.284	50
231 85 63	PLUS	11.0 / 170	.284	50








LEAD FREE BULLET





9.0 / 139



<b>CALIBRE 9.3 MI</b>	

241 69 72	ZERO	11.9 / 184	.366	50
241 69 88	EXPRESS	16.5 / 255	.366	50
214 54 48	SOFTPOINT	16.5 / 255	.366	50
231 85 66	PLUS	16.5 / 255	.366	50



### **BULLETS**

### FOR PISTOL AND REVOLVER CARTRIDGES

Item No.	Calibre	Туре	Weight g / gr	Dia	Bullets/box
240 04 00 240 04 01	9 MM	Full Metal Jacket	8.0 / 124	.355	200 1500
231 90 10 231 90 11	9 MM	HEXAGON	8.0 / 124	.355	200 1500
231 81 47 231 81 48	9 MM	Full Metal Jacket Flat Nose	10.0 / 154	.355	200 1500
231 81 49	9 MM	Jacketed Hollow-Point	7.5 / 115	.355	200
231 81 50 231 81 51	.40 S&W	Full Metal Jacket Flat Nose	11.7 / 180	.401	200 1500
241 78 48	.45 AUTO	HEXAGON	13.0 / 200	.451	200
231 81 53	.45 AUTO	Full Metal Jacket	14.9 / 230	.451	200
231 81 54	.45 AUTO	Jacketed Hollow-Point	14.9 / 230	.451	200
231 81 55 231 81 56	.38 SP/ .357 MAG.	Full Metal Jacket Flat Nose	10.2 / 158	.357	200 1500
231 81 57	.38 SP/ .357 MAG.	Jacketed Hollow-Point	10.2 / 158	.357	200
231 94 83 231 94 84	.38 SP/ .357 MAG.	HEXAGON	11.7 / 180	.357	200 1500
241 78 52	.44 REM. MAG.	HEXAGON	19.4 / 300	.431	150



# CASES FOR PISTOL AND REVOLVER CARTRIDGES

Item No.	Calibre	Cases/box
231 81 29	9 MM LUGER	100
231 81 30	9 MM LUGER	1000
231 81 31	.38 SUPER AUTO	100
231 81 32	.38 SUPER AUTO	1000
231 81 33	.40 S&W	100
231 81 34	.40 S&W	1000
231 81 35	.45 AUTO	100
231 81 36	.45 AUTO	1000

Item No.	Calibre	Cases/box
		The second
231 81 37	.38 SPECIAL	100
77.00		
231 81 38	.38 SPECIAL	1000
231 81 39	.357 MAG	100
231 81 40	.357 MAG	1000
241 78 53	.44 REM. MAG	50
- 10110-0		
240 94 87	.44 REM. MAG	1000







The 4x zoom riflescopes have a central tube diameter of 30 mm and stand out due to their optical performance specs for transmission, field of view and exit pupil. With the 3-12x56 and the 6-24x50, the range includes two absolute classics with outstanding performance specs for this price class.

The 5x zoom riflescopes with a central tube diameter of 30 mm stand out with their optimised zoom factor and thus increased flexibility and versatility without sacrificing their high optical performance.

#### New 1.7-9 x 44i

With a magnification range of 1.7-9 x, the new GECO riflescope is the ideal choice for a wide range of use cases, from high seat to driven hunts. It boasts a 44 mm lens diameter which is well suited to hunts that continue through to dusk, and which remains easy to handle when used in combination with night-vision equipment.

#### **OPTICS**





















#### 1-5x24i

The perfect companion during driven hunts. Its large field of view improves safety and ensures that the shooter always has a comprehensive overview. The 5x zoom enables fast shooting even at long distances.



#### 3-12x56/56i

The classic all-rounder for high seat and night-time hunting. Its 56 mm diameter lens, high transmission, and illuminated reticle offer increased reliability, even in extremely unfavourable lighting.



#### 3,5-18 x 56i

With its large lens diameter and illuminated reticle, this riflescope ensures you are always ready to take shots at short or long range even in extremely unfavourable light conditions. The focus here is on its flexibility and high optical performance.


# **RIFLESCOPES**





6-24x50

The specialist for long distances. Its high magnification is perfect for accurate shooting at long distances. This is supported by the GECO TR1 ballistic reticle and the high optical performance allows the recognition of even the finest details at long distances.



1	00	M	
		3	
/ k			to be

			APARENCE III. LP	The second secon	The second secon		
Sem	Item No.	Product	Reticle	Field of view at 100 m	Central tube Ø	Overall length	Weight approx.
			The second secon				
1	240 64 76	1-5x24i	4i	37.0 - 6.0 m	30 mm	260 mm	550 g
NEW	242 27 35	1.7-9×44i	4i	27.5-4.6 m	30 mm	335 mm	600 g
							_
100	240 64 72	3-12x56	4	12.5 - 3.0 m	30 mm	340 mm	674 g
SUDE	240 64 75	3-12x56i	4i	12.5 - 3.0 m	30 mm	340 mm	674 g
No. 177	240 64 77	3.5 - 18 x 56i	4i	11.8 - 2.2 m	30 mm	335 mm	850 g
07 7	240 64 71	6-24x50	TR1	5.6 -1.5 m	30 mm	362 mm	750 g

## **RED DOT SIGHT**

#### **FOR DRIVEN HUNT AND** DYNAMIC SPORT SHOOTING





Item No.	Product	Reticle	Field of view at 100 m	Central tube Ø	Overall length	Weight approx.
231 92 19	RED DOT R20 - 2.0	2 MOA Dot	100 m	22 mm	62 mm	130 g
240 71 55	OPEN RED DOT SIGHT	2 MOA	100 m	19x23 mm	46 mm	30 g











#### **RED DOT R20 - 2.0**


The ideal companion for driven hunts over difficult terrain. The finely dimmable illuminated dot with a diameter of 2 MOA facilitates quick, intuitive and reliable target acquisition in every situation. The built-in weaver mount means the GECO Red Dot can be attached quickly and easily.



#### **OPEN RED DOT SIGHT**

The new GECO Open Red Dot Sight is exceptionally compact, lightweight and at the same extremely robust. With its open field of view, it is the optimal companion on driven hunts for targets at short and medium distances with intuitive target acquisition. The fine 2 MOA dot is adjustable to six brightness levels. The specially coated and scratch-resistance glass lens prevents reflections. Replacing batteries is exceedingly user-friendly and can be done on the side compartment even when mounted, using commercially available mounting adapters on all bases.

**CAUTION:** Not suitable for use on handguns!

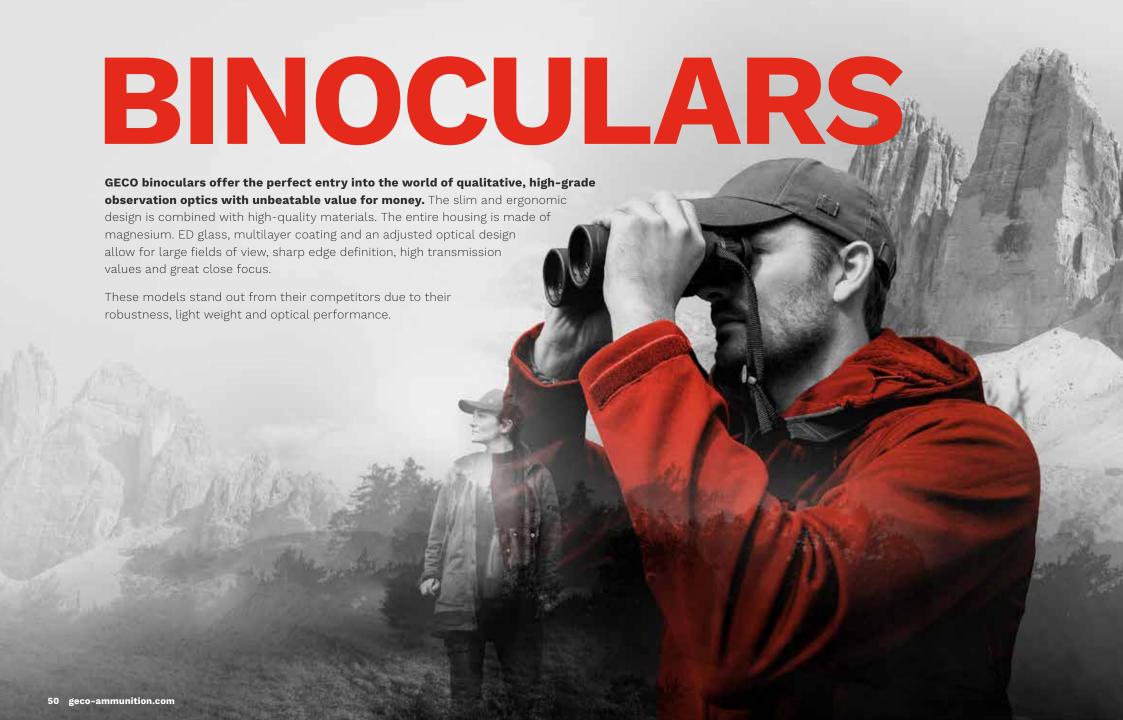



#### 10 x 50 RF

The GECO 10 x 50 RF pairs a magnesium housing with a robust and shock-absorbing rubber armor so that it can offer an optimal protection for sensitive optical and electronic elements as well as moving parts.

With the use of high-quality HD optics in combination with cutting-edge multiple lens coatings, top performance in

light transmission, field of view, edge sharpness and color fidelity are achieved. The distance to all objects from 10 to 1600 meters away can be simply and reliably determined at the touch of a button. In addition, the GECO RF can measure both angle of elevation (and corrected distance using the integrated ballistics calculator) and temperature.

The GECO 10x50RF comes with a carrying strap and a hard case.

#### **OPTICS**













fig. 8x32

#### 8x32/ 10 x 32



The perfect companion for virtually every observation scenario. Extreme compactness and low weight make for optimum handling. Their optics deliver razor-sharp images in good ambient light.

fig. 10 x 42

## 8x42/



Due to a wide field of view, they offer an excellent overall view coupled with a steady image. A greater lens diameter, ED glass and GECObright multi-layer coating create sufficient light reserves for use into advanced twilight.


fig. 8x56

#### 8x56/ 10 x 56



Both powerful and effective. The compact and lightweight design combined with the very large fields of view and the large exit pupil make spotting a relaxed activity. The high transmission values create bright and high-contrast images for hunting until nearly nightfall.

52 geco-ammunition.com

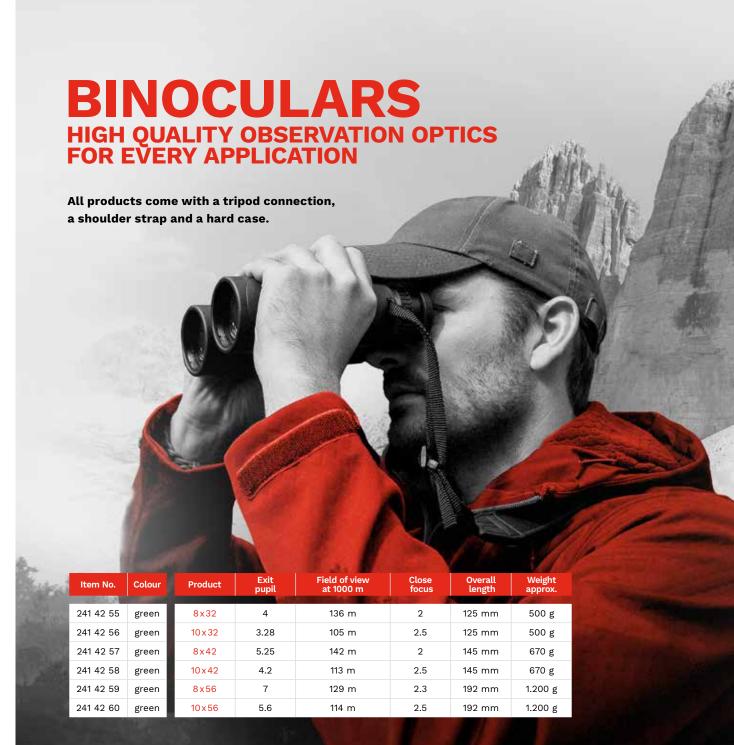

### **ICONOGRAPHY**



LIGHTWEIGHT, RUGGED MAGNESIUM HOUSING

GECOBRIGHT - MAXIMUM

TRANSMISSION IN EVEN THE MOST

ADVERSE LIGHTING CONDITIONS



EYECUPS MADE FROM HIGHEST-QUALITY ALUMINIUM



ED GLASS FOR RAZOR-SHARP IMAGES

DETACHABLE MOUNTING

DETACHABLE

MOUNTING



2-YEAR GUARANTEE (WARRANTY ON ELECTRONIC COM-PONENTS LIMITED TO 24 MONTHS)



10-YEAR GUARANTEE (WARRANTY ON ELECTRONIC COM-PONENTS LIMITED TO 24 MONTHS)



5-YEAR GUARANTEE (WARRANTY ON ELECTRONIC COM-PONENTS LIMITED TO 24 MONTHS)



DIVERSE MEASURING OPTIONS: DISTANCE, ANGLE, BALLISTIC RANGE



LIGHTWEIGHT CONSTRUCTION FOR OPTIMUM HANDLING



SELF-DEFENCE



WITH INTEGRAL

RANGEFINDER

TOOL-FREE RESETTING FOR ULTRA-FAST LOCKING



34MM CENTRAL TUBE DIAMETER FOR LARGE ADJUSTMENT RANGES



RETICLE IN THE FIRST IMAGE PLANE FOR TACTICAL SHOOTING



HARD-SHELL CARRY CASE FOR MAXIMUM PROTECTION



GECOTRAC - HEIGHT ELEVATION

AND TARGET TURRET IN ONE

GECODROP - DIRT- AND WATER-REPELLENT, HYDROPHOBIC COATING FOR CLEAR SIGHT



EXTENDED FIELD OF VIEW FOR OPTIMUM OBSERVATION



GECO TR1 - ACCURATE LONG-RANGE-SHOOTING WITHOUT RETICLE ADJUSTMENTS



2 MDA



CENTRAL FOCUSING WITH



HD GLASS FOR IMAGES WITH MAXIMUM BRILLIANCE



GECODOT - INTELLIGENT AUTOMATIC

SHUTOFF FOR MAXIMUM

ENERGY EFFICIENCY

STATIC TARGET SHOOTING

TRAINING



GECOCONTROL - INTELLIGENT

AUTOMATIC SHUTOFF FOR

MAXIMUM ENERGY EFFICIENCY

TACTICAL TURRET FOR FAST AND ACCURATE BULLET DROP COMPENSATION



INTEGRATED DIOPTRE ADJUSTMENT MAKES HANDLING EASY



EXTREMELY ERGONOMIC THANKS TO THE MICROBRIDGE









#### GECO IS A REGISTERED TRADEMARK OF RUAG AMMOTEC, A RUAG GROUP COMPANY. RUAG AMMOTEC – FÜRTH, GERMANY

In accordance with the Weapons Act of the Federal Republic of Germany, purchase records must be kept and permission to purchase is required for many products in this catalogue. Products for which no records must be kept and/ or for which no permission to purchase is required by law are marked accordingly. We reserve the right to make technical alterations to the products illustrated or described without giving prior notice. The complete range of products is not available in every country!

Although the information contained in this brochure is correct to the best of our knowledge, we cannot accept liability for any errors or inaccuracies. We reserve the right to discontinue or modify any product at any time without giving prior notice. Delivery of the products depicted may be subject to legal restrictions.

All rights to photocopies and to the reprinting of excerpts are to be granted solely with the written permission of RUAG Ammotec GmbH.

